

Consolidate your specialty testing

Our automated immunoassays



ids isys

System

Dimensions

- System: L 105 x H 70 x W 75 cm
L 41.3 x H 27.5 x W 29.5 inch
- Weight: 103 kg
- Basis weight: 130 kg/m²

Power supply

- Voltage: 100 – 240 V
- Frequency: 50 – 60 Hertz
- Maximum power consumed: 750 VA

Environment

- Sound level: up to 66 dB
- The surrounding temperature must be between 18°C and 30°C
- Emitted heat: up to 530 W (1808 BTU/h or 16,5 cal/s)
- Relative humidity must be within 20 and 80% (non-condensing at 25°C)

Throughput

- Random access
- Time to first results: < 25 minutes (assay dependent)
- Up to 120 tests/hour (assay dependent)
- > 600 results per day (assay dependent)

Immunoassay detection

Luminometer

- Wavelength: from 300 to 500 nm
- Linearity: Up to 10 Million RLU

Spectrophotometer

- Spectrophotometer with LED technology
- 12 wavelength interferential filters: 340, 405, 450, 500, 540, 550, 580, 620, 650, 700, 720 and 750 nm
- Linearity: Up to 3 Abs
- Bi-chromatic mode availability
- Optic path of cuvettes: 0.8 cm

Samples/reagents management

Samples

- 120 positions for samples, calibrators and controls (6 racks with 10 positions)
- Serum, plasma, urine, others (saliva...)
- Sampling on Primary Tubes, Secondary Tubes, Micro cups, pediatric tubes
- Default Sample tube library: Primary Tubes: 5 mL (13 x 75 mm), 7 mL (13 x 100 mm), 10 mL (16 x 75 mm)
- Secondary Tube: 5 mL (13 x 75 mm)
- Micro cups: 500 mL, 2 mL
- Other sample containers can be defined by the user
- STAT sample
- Automatic reading of barcoded sample tubes (positive identification)
- Barcode types: Code 2/5, EAN/UPC, Code 39, Code 128 and Codabar
- On-board dilution and automatic pre-treatment

Reagent compartment

- Up to 15 different immunoassay cartridges
- Integrated reader for automatic reading of reagent cartridge barcodes
- Onboard storage: 12 - 15 °C

Sample handling

- Single pipetting arm for samples and reagents
- Liquid level detection by capacitance (samples and reagents)
- Clot detection (by pressure transducer)
- Internal and external rinsing between each pipetting of sample
- Possibility of specific rinses using decontaminating solution
- Preheating of sampling (reagents & samples)
- Sample volumes: from 4 µl to 300 µl (assay dependent)

Carousel

- Temperature regulated at 37°C ± 0.5°C
- 90 positions for disposable cuvettes
- 4 Independent washers

Cuvette loader

- Loader for 1 x cube of cuvettes
- 1 x cube contains 960 disposable cuvettes
- 960 cuvettes on board
- During operation, the capacity can be extended to 1120 cuvettes
- Preheated loader

Waste collection

- 10 litres container for liquid waste
- Solid Waste (cuvettes) disposed of in solid waste drawer

Ancillary reagents

- IDS-iSYS Liquid System (5 L)
- IDS-iSYS Wash solution (10 L)
- IDS-iSYS Triggers (250 mL each)
- IDS-iSYS D-SORB Solution (2x1 L)
- IDS-iSYS CCS
- IDS-iSYS Cuvettes
- IDS Immunocleaner

Graphic user interface and computer

GUI

- User level management
- Continuous access to programming
- Full traceability: patient results, calibrations, controls...
- Automatic calibration. QC management: up to 4 levels, analysis by Levey-Jennings and Westgard rules (configurable) Lot management of reagents, calibrators and controls by barcodes
- Reagent stability management
- Local storage of 5,000 patient results (including traceability)
- Connection to LIS: bidirectional communication (ASTM protocol), RS-232 or RJ45

Operating system

Minimum configuration required:

- Operating system: Windows 7/10
- Microprocessor: Type Core i5, 3.6 GHz
- Live memory: 4 Gb
- Hard disk: 500 Gb
- Ethernet: 2 independent Ethernet network adaptors
- Ports: USB ports (min 2 one of which at front)
- Input devices: USB Keyboard (country specific), Mouse (optional)
- Screen: 22 inches (touchscreen) monitor, speakers integrated
- Screen resolution: 1920 x 1080 pixels
- Peripherals: Reader-DVD writer, integrated graphics device



ids isys

Specialty Immunoassay Automation

IDS - iSYS Multi-Discipline Automated System

Automate your specialty testing



Optimized up-time



Dedicated support service



A truly versatile and compact analyser



Results you can trust

Connect with us

Global Headquarters
Immunodiagnostic Systems Ltd, 10 Didcot Way,
Baldon Business Park, Baldon, Tyne & Wear, NE35 9PD, United Kingdom

+44 (0) 191 519 6155 | info@idsplc.com | www.idsplc.com



Pipeting area

Liquid level sensing & iCM technology. Decontamination process prevents sample carry-over. Wide range of sample volumes. Sample mixed in cuvette. On-board sample pre-treatment




Sample area

Up to 120 positions for samples, calibrators and controls (6 racks with 20 positions). Continuous access, with all types of tube supported



Reagent area

Up to 15 reagent positions. Continuous loading and automated barcode recognition

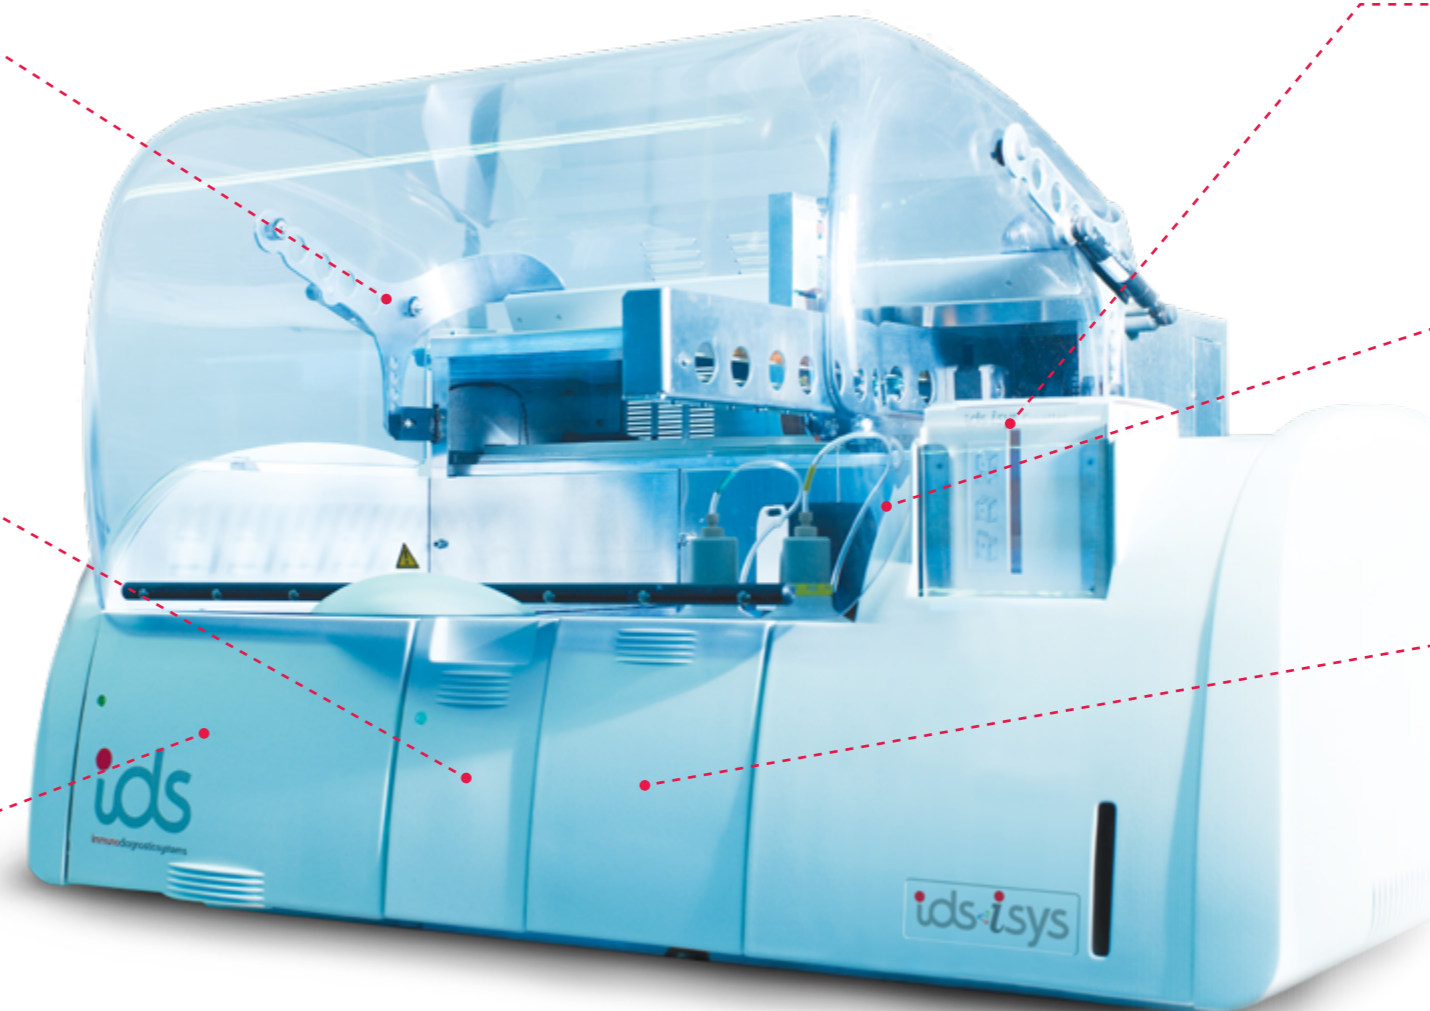

Cuvettes

Continuous loading. Up to 1120 cuvettes on board. Each cuvette box contains 960 cuvettes.





Analytical area

The Modular Analytical Platform (MAP) is a highly reliable assay processing system, with no user maintenance



Ancillary area

All ancillaries are ready to use and can be continuously loaded during a run. All information is logged for a full traceability

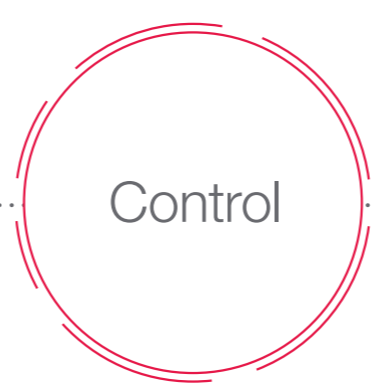

In-house development

- Instrument development is in-house no outsourcing (True IDS instrument)
- Full control of development (hardware & software)
- Unique Modular Analytical Platform (MAP)

A truly versatile and compact analyser

- Can manage several types of technology
- Luminometer, spectrophotometer, sedimentation module
- Ideal for laboratory, research and industrial requirement

Optimized up-time

- Load and unload everything without pausing the run
- Samples | Reagents
Solid Waste | Ancillaries
- Automatic start up, auto-control and standby
- Automatic self-maintenance
- True walk-away system

Results you can trust

- Assay integrity guaranteed through:
Intelligent Clot Management › iCM
High Pressure Rinsing › HPR
- Automatic cleaning/ decontamination program

Dedicated support service

- Highly qualified team for on-site training and after sales services
- Technical specialists and engineers provide dedicated support
- Annual preventative maintenance and routine upgrades

G.U.I software management

- Meets lab accreditation requirements
- Total L.I.S. capability
- Automatic rules for re-test, dilutions etc.
- Full traceability
- Remote control

IDS SDspeed calc software

- A faster way to monitor patient growth disorders
- Normal value data base with **15,000** samples
- SD Score calculator to facilitate clinical data management